1. The information and date contained this drawing is proprietary to DIAMOND ENGINEERING CO., LTD. Any and all intellectual property right of this drawing is exclusively reserved by DIAMOND ENGINEERING CO., LTD.
2. Copying this document or making it available to a third party, in whole or in part, is prohibited without written permission from DIAMOND ENGINEERING CO., LTD.
3. The unauthorized use of this drawing or use contrary to its intended purpose is not permitted and shall be prosecuted.
4. All drawings must be returned to immediately when DIAMOND ENGINEERING CO., LTD request it and/or they are terminated of its intended use or purpose.

50A 自動ボール弁 仕様	
流体	粉体、スラリー、液体、ガス
最高使用圧力	0.97 MPa
最高使用温度	80 ℃
Tag No.	*** 計 **台

NOTE

付属品：リミットスイッチ
電磁弁
サイレンサー
スイッチ保護カバー

駆動部取付姿勢： TYPE1. ■ TYPE2. □

無通電時： バルブ-開. □ バルブ-閉. ■

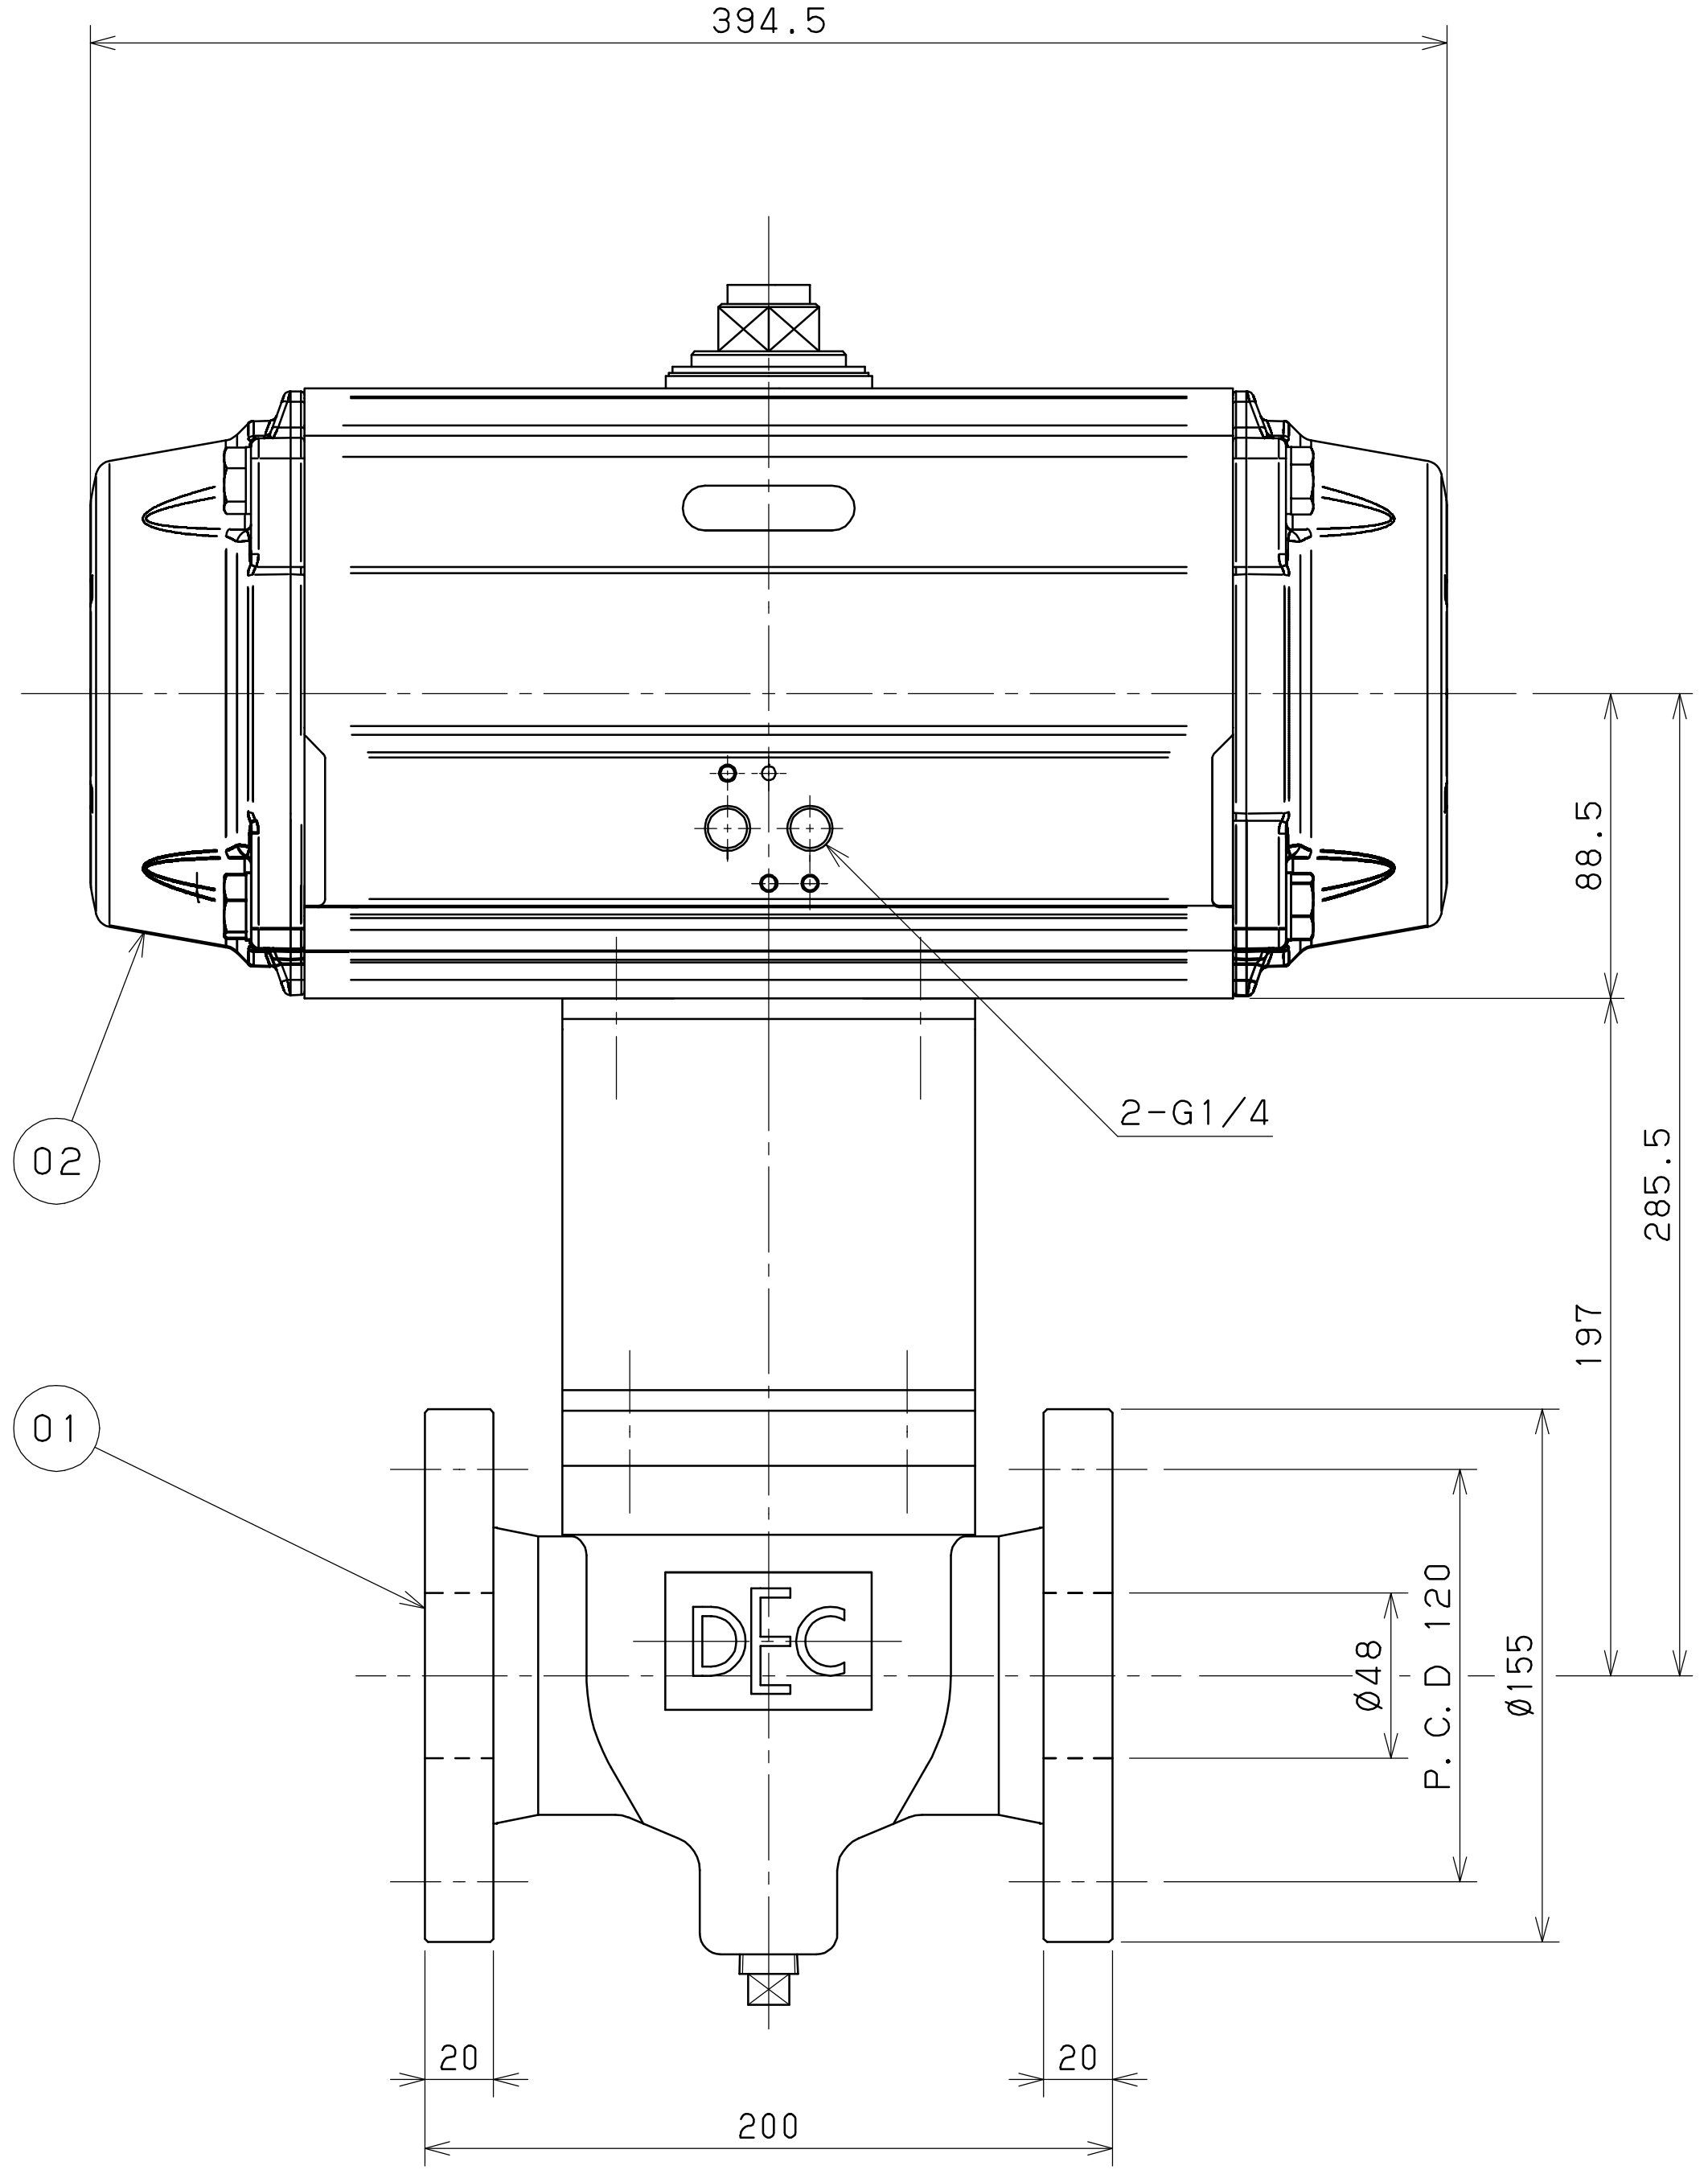

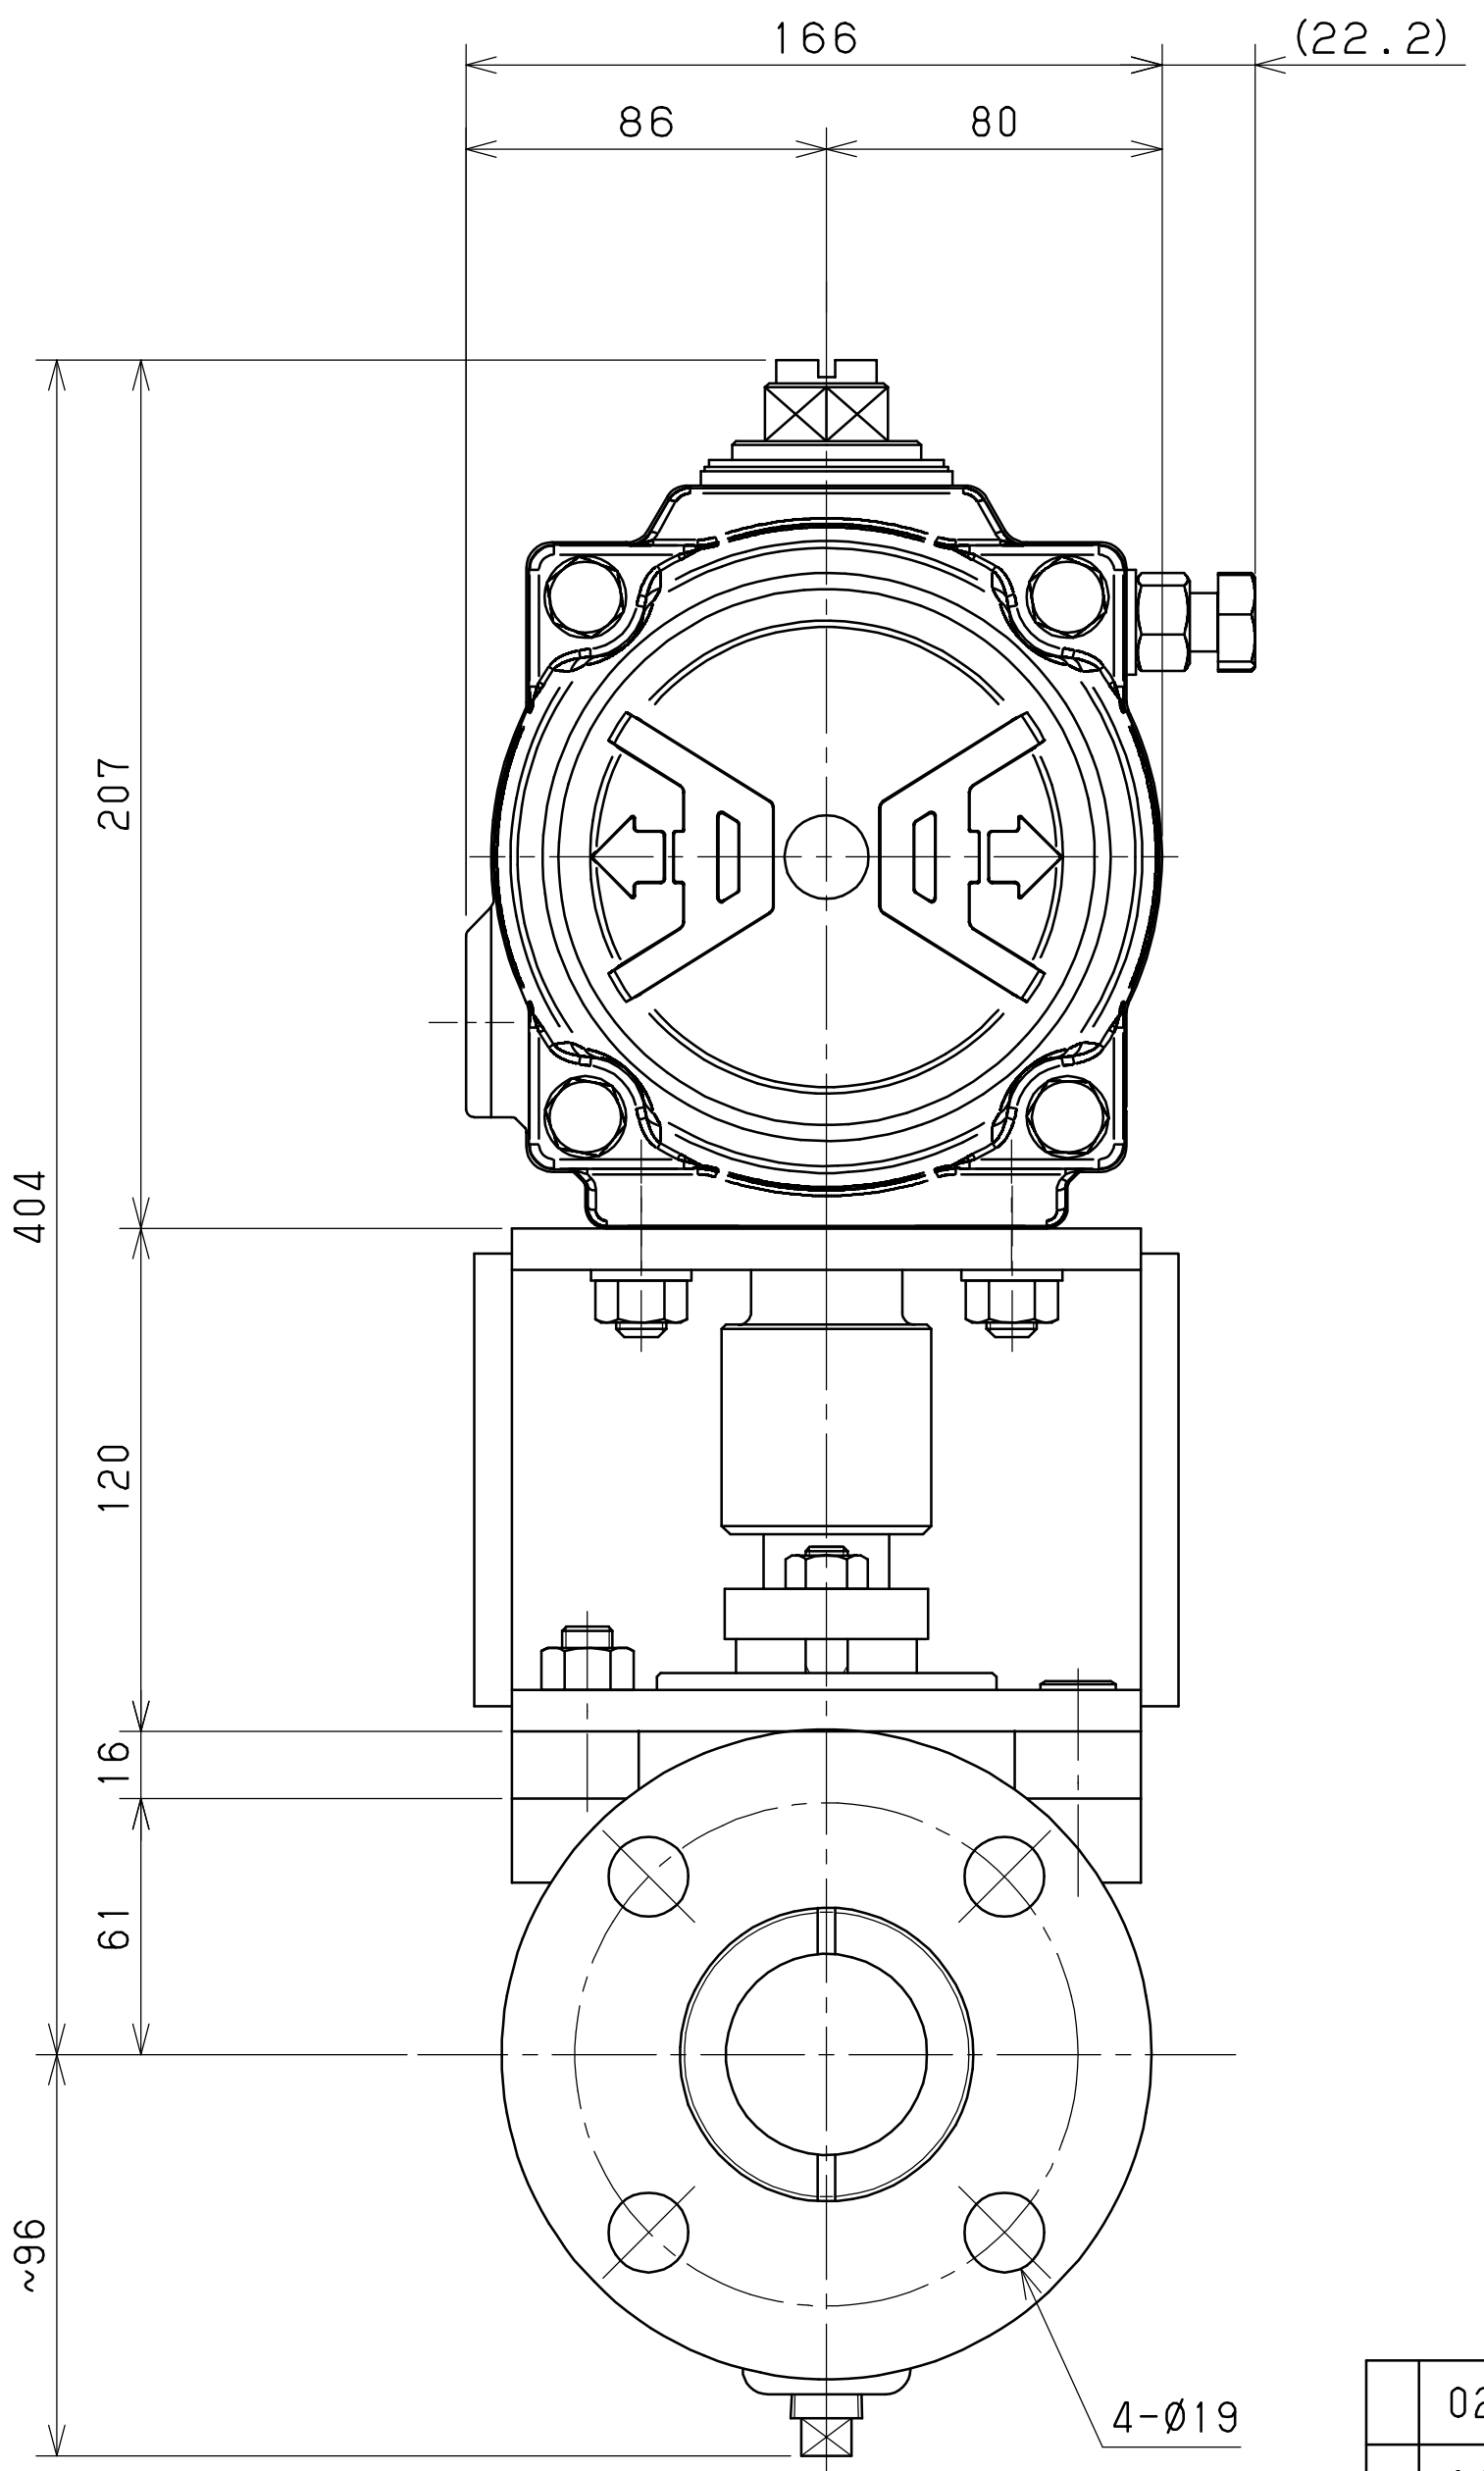

重量 35kg

02	ACTUATOR	READY MADE	1			
01	BODY	SCPH2	1			
ITEM	DESCRIPTION	MAT'L	Q'TY	PER ONE WT(kg)	TOTAL WT(kg)	REMARK

FOR

参考図

TITLE
50A JIS10K
BALL VALVE
OUT LINE DRAWING

DATE	----.--.--
DRAWN	--
DESIGN'D	--
CHECK'D	--
APP'D	--

NO.	REVISION	DATE	BY	CHK'D	APP'D
3					
2					
1					

DIAMOND ENGINEERING CO., LTD.
TOYAMA JAPAN

SCALE	1/2.5	PROJECTION	JOB. NO. ---
DWG. NO.	DEC H-VALVE 50-00		REV 0